

## Lifting Magnets




### Ultralift Plus



- Magnetic lifters are quicker and easier to use than slings, chain or mechanical grabs and do not mark the finish of the load
  - The Ultralift Plus incorporates the (patented) "safety shim"

Length (Inch)	Height (Inch)	Width (Inch)	Weight (lbs)	Flat Section SWL (lbs)	Flat Section Min. Thickness (Inch)	Flat Section Max. Length (Inch)	Round Section SWL (lbs)	Round Section Max. Diameter (Inch)	Code
6.1	2.9	2.7	9	275	0.79	60	110	8	381080
8.4	3.8	3.6	24	550	1.00	60	220	12	381081
11.8	5.0	4.8	59	1100	1.18	60	440	16	381082
14.1	6.9	6.9	139	2200	1.77	60	880	18	381083
18.8	8.9	9.2	345	4400	2.17	80	1760	24	381084

## Non-Contact Magnetizer/Demagnetizer

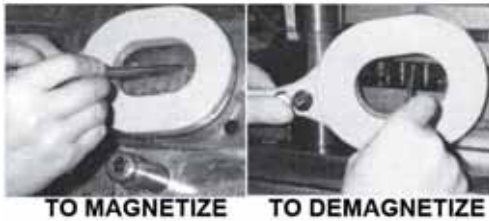

**Magnetizing:** Hold item to be magnetized in the middle of the opening. Press the red button for 3-5 seconds and release again. Take part out of the loop, and check for magnetism.

**Demagnetizing:** While pushing the red button, move the part to be demagnetized through the inside of the loop without making physical contact.

Code
435551