


Live Centers - Short Profile - Regal

Standard Point and Long Point (CNC)

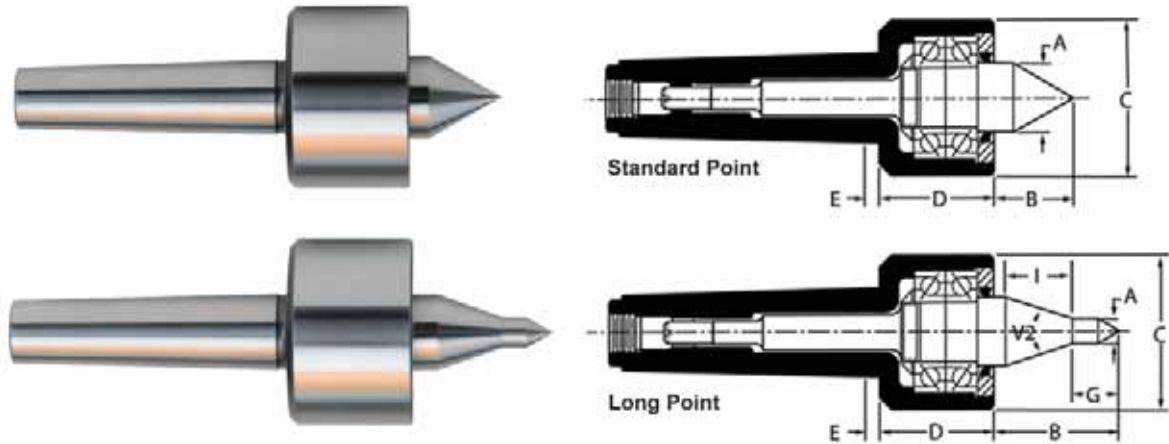

- Accuracy guaranteed to $\pm 0.00005''$
- Short profile takes up less space
- Points are through-hardened to 61-63 HRC
- Full length spindle for extra rigidity
- Two angular contact bearings for superior performance in a compact design
- Bodies are heat-treated for additional strength
- Long point configuration allows for tool clearance

Standard Point

Morse Taper	A (Inch)	B (Inch)	C (Inch)	D (Inch)	E (Inch)	Maximum RPM	Workpiece Weight (lbs)	Code
2	1	1-1/4	2-3/8	1-3/4	1/4	4000	440	100373
3	1	1-1/4	2-3/8	1-3/4	1/4	4000	1100	100374
4	1-3/8	1-1/2	3	1-31/32	3/8	4000	2100	100375
5	1-3/8	1-13/16	3-1/16	2-9/32	9/32	5000	2800	100376

Long Point (CNC)

Morse Taper	A (Inch)	B (Inch)	C (Inch)	D (Inch)	E (Inch)	G (Inch)	V2	I (Inch)	Maximum RPM	Workpiece Weight (lbs)	Code
2	3/8	1-7/8	2-3/8	1-3/4	1/4	5/8	34°	1-21/32	4000	310	100369
3	3/8	1-7/8	2-3/8	1-3/4	1/4	5/8	34°	1-21/32	4000	640	100370
4	1/2	2-7/32	3	1-31/32	3/8	13/16	34°	2	4000	1100	100371
5	1/2	2-1/2	3-1/16	2-9/32	9/32	15/16	44°	2	5000	1100	100372