


Boring Bars – Boring & Chamfering



High Speed Steel & Carbide

2 Piece Style ASB

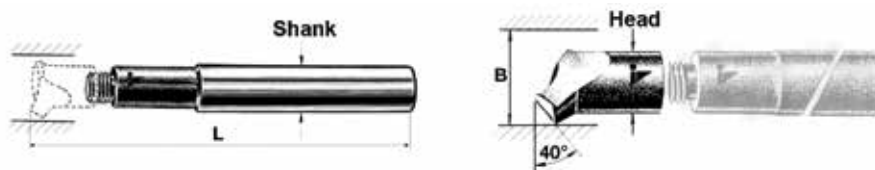

Head and shank sold separately

Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	HSS Head		Carbide Head		Shank Code
			L Length (mm)	Code	L Length (mm)	Code	
3	17	10	–	–	–	–	500202
3	17	12	200	500007	200	500034	500203
4	21	13	230	500008	230	500035	500204
5	24	15	260	500009	260	500036	500205
6	28	17	280	500010	280	500037	500206
7	31	19	310	500011	310	500038	500207
8	34	20	330	500012	330	500039	500208
9	37	22	360	500013	360	500040	500209
10	42	25	390	500014	390	500041	500210
11	50	30	430	500015	430	500042	500211
12	60	35	500	500016	500	500043	500212

Boring Bars – Boring & Facing



High Speed Steel & Carbide

Single Piece Style ECS



Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	HSS Regular Length		HSS Long Length		Carbide	
			L Length (mm)	Code	L Length (mm)	Code	L Length (mm)	Code
0000	3.5	8	45	500051	52	500070	45	500078
000	4.5	8	49	500052	58	500071	49	500079
00	5.5	8	52	500053	64	500072	64	500080
0	7	8	56	500054	69	500073	69	500081
1	11	8	65	500055	82	500074	82	500082
2	13	8	72	500056	100	500075	72	500083