



Live Center Sets 7 Interchangeable Points

- Construction consists of double rows of ball bearings and thrust bearings
- Ground for higher accuracy
- 60° point

SET INCLUDES:

- 5 male centers
- 1 female center
- 1 bull center
- 1 extractor
- Supplied In fitted storage case

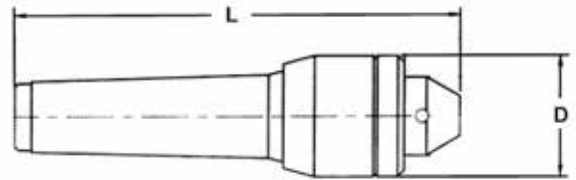

Morse Taper	D Outside Diameter (Inch)	L Length (Inch)	Code
2	1.57	5.20	120122
3	1.81	6.22	120123
4	1.81	7.08	120124
5	2.50	9.21	120125

Dead Centers

High Speed Steel & Carbide Tipped





Morse Taper	HSS	Carbide Tipped
	Code	Code
1	125101	125111
2	125102	125112
3	125103	125113
4	125104	125114
5	125105	125115
6	125106	125116

Dead Centers with Nut

Alloy Steel & Carbide Tipped

- +/-0.0001" total indicator runout
- These dead centers are designed for use wherever high accuracies are required
- Case hardened to 61-63 RC
- Centers supplied with nuts

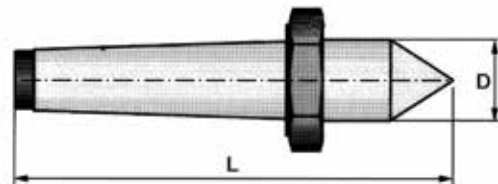

Morse Taper	L (Inch)	D (Inch)	E (Inch)	Weight (lbs)	Alloy Steel	Carbide Tipped
					Code	Code
1	3.54	0.48	0.28	0.22	826323	826329
2	4.41	0.71	0.28	0.55	826324	826330
3	5.43	0.95	0.43	1.10	826325	826331
4	6.89	1.24	0.55	2.43	826326	826332
5	8.54	1.76	0.71	5.73	826327	826333
6	11.42	2.51	0.71	14.55	826328	826334