

Precision Milling Machine Vises




277064



277065



277066

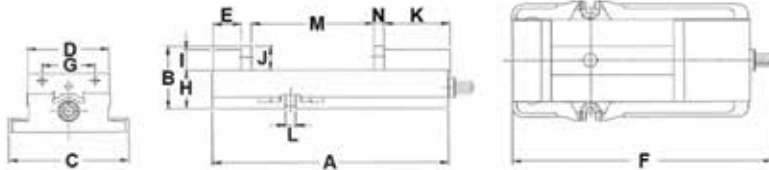

Bed Height (from machine table)	Clamping Force (lbs)	Code
2.875" ±0.0005"	6,700	277064
2.875" ±0.0005"	7,900	277065
3.310" ±0.0005"	11,600	277066

A (Inch)	B (Inch)	C (Inch)	D (Inch)	E (Inch)	F (Inch)	G (Inch)	H (Inch)	I (Inch)	J (Inch)	K (Inch)	L (Inch)	M (Inch)	N (Inch)	Weight (lbs)	Code
17.01	4.63	9.25	6	2.05	18.74	3.87	2.87	1.50	1.75	4.84	0.69	7.5	0.71	79	277064
17.20	4.63	8.75	6	2.05	18.94	3.87	2.87	1.50	1.75	4.84	0.69	8.9	0.71	80	277065
21.85	5.51	11.61	8	2.28	23.03	4.72	3.31	1.97	2.20	6.18	0.81	10.4	0.95	150	277066

Toolmaker's Vises



321482 and 321483



321486

- Squareness and parallelism guaranteed within 0.0002" on sides and bottom
- Made of hardened steel and precision ground
- Horizontal and vertical v-grooves in movable jaw
- The "no rise" jaw construction exerts continual downward pressure on the jaw, preventing the jaw from rising which is a common problem on most vises

Jaw Width (Inch)	Jaw Opening (Inch)	Jaw Depth (Inch)	Overall Length (Inch)	Overall Height (Inch)	Code
2	3-1/8	1	5-1/2	2	321482
3	3-3/4	1-3/8	7	2-1/2	321483
3	4	1-3/8	7-1/4	2-1/2	321486



Jaw Width (Inch)	Jaw Opening (Inch)	Jaw Depth (Inch)	Vise Length (Inch)	Code
2	2-1/2	1	6	321488
2-1/2	3-1/2	1-1/4	7-1/2	321489
3	3-1/2	1-1/4	8-1/2	321490