

Plain Clamps




Bolt Size (Inch)	Length (Inch)	Width (Inch)	Thickness (Inch)	Code	Bolt Size (Inch)	Length (Inch)	Width (Inch)	Thickness (Inch)	Code
3/8	2-1/2	1	1/2	400302	5/8	6	1-1/2	7/8	400326
3/8	4	1	5/8	400304	3/4	4	1-1/2	3/4	400334
3/8	6	1-1/8	3/4	400306	3/4	6	1-1/2	1	400336
1/2	2-1/2	1-1/8	1/2	400312	3/4	8	1-3/4	1-1/8	400338
1/2	4	1-1/4	3/4	400314	1	6	2	1-1/4	400346
1/2	6	1-1/4	7/8	400316	1	8	2	1-3/8	400348
5/8	2-1/2	1-1/4	5/8	400322	1	10	2	1-1/2	400350
5/8	4	1-1/2	3/4	400324					

Flanged Nuts

Northwestern

Inch & Metric



- UNC
- Heat treated steel with black oxide finish for long life under repeated usage
- Flange provides large bearing surface and reduces chance of possible damage to part being clamped


Inch

A Thread Size	B (Inch)	C (Inch)	D (Inch)	E (Inch)	Code
1/4-20	5/8	5/16	3/32	1/2	217339
5/16-18	3/4	3/8	1/8	9/16	217340
3/8-16	7/8	1/2	1/8	11/16	217341
7/16-14	1	9/16	5/32	3/4	217342
1/2-13	1-1/8	11/16	3/16	7/8	217343
5/8-11	1-3/8	13/16	3/16	1-1/16	217344
3/4-10	1-5/8	1	1/4	1-1/4	217345
7/8-9	1-3/4	1-1/8	1/4	1-7/16	217346
1-8	2	1-1/4	1/4	1-5/8	217347
1-1/4-7	2-1/2	1-1/4	1/4	1-13/16	217348

Metric

A Thread Size	B (mm)	C (mm)	D (mm)	E (mm)	Code
M8 x 1.25	19.0	9.5	2.4	14.3	217607
M10 x 1.50	22.2	12.7	3.2	17.4	217608
M12 x 1.75	28.5	17.4	4.0	22.2	217609
M16 x 2.00	35.0	20.6	4.7	27.0	217610


Flanged Nuts



- UNC
- Heat treated steel with black oxide finish for long life under repeated usage

A Thread Size	B (Inch)	C (Inch)	D (Inch)	E (Inch)	Code
5/16 - 18	3/4	3/8	3/32	9/16	400800
3/8 - 16	7/8	1/2	1/8	11/16	400802
1/2 - 13	1-5/16	11/16	1/8	13/16	400804
5/8 - 11	1-3/8	13/16	3/16	1-1/16	400806
3/4 - 10	1-1/2	1	1/4	1-1/4	400808
7/8 - 9	1-3/4	1-1/8	1/4	1-7/16	400810
1 - 8	2	1-1/4	1/4	1-5/8	400812

Coupling Nuts

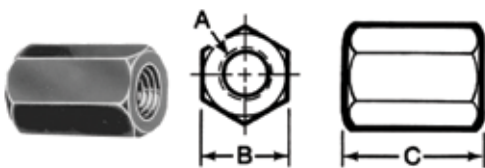

- Heat treated steel with black oxide finish

A Thread Size	B Hex Size (Inch)	C Length (Inch)	Code
5/16 - 18	9/16	7/8	400601
3/8 - 16	11/16	1	400602
1/2 - 13	7/8	1-1/4	400604
5/8 - 11	1-1/16	1-5/8	400606
3/4 - 10	1-1/4	1-7/8	400608
7/8 - 9	1-7/16	2-1/4	400610
1 - 8	1-5/8	2-1/2	400612