


Electronic Calipers

Zinc Alloy Casing

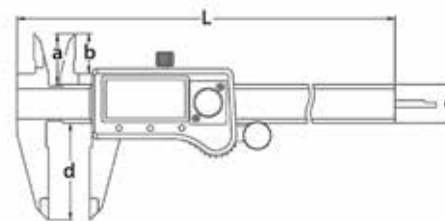


- Resolution: 0.0005"/0.01mm
- Die cast zinc alloy casing
- Buttons: zero, on/off, inch/mm
- Auto power off, move unit to turn power on
- Battery CR2032
- Supplied in fitted storage case

Range (Inch/mm)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	d (Inch)	INSIZE No.	Code
0-6/0-150	±0.0012	9.291	0.827	0.630	0.630	1.575	1114-150	816012
0-8/0-200	±0.0012	11.260	0.945	0.748	0.630	1.969	1114-200	816014
0-12/0-300	±0.0012	15.748	0.984	0.807	0.669	2.362	1114-300	816016

Electronic Calipers

Carbide Tipped Jaws

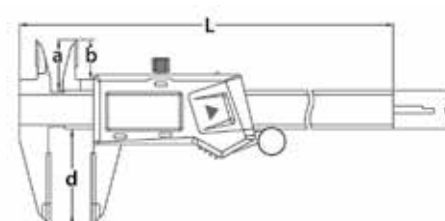



- Resolution: 0.0005"/0.01mm
- Wear resistant carbide tipped jaws for inside and outside measurements
- Buttons: zero, on/off, inch/mm
- Auto power off, move the unit to turn power on
- Battery CR2032
- Stainless steel
- Data output
- Supplied in fitted storage case

OPTIONAL ACCESSORY: SPC cable

Range (Inch/mm)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	d (Inch)	INSIZE No.	Code
0-6/0-150	±0.0012	9.291	0.827	0.630	0.630	1.575	1110-150A	280021
0-8/0-200	±0.0012	11.260	0.945	0.748	0.630	1.969	1110-200A	280022
0-12/0-300	±0.0012	15.748	0.984	0.807	0.669	2.362	1110-300A	280023

Electronic Calipers

Coolant Proof

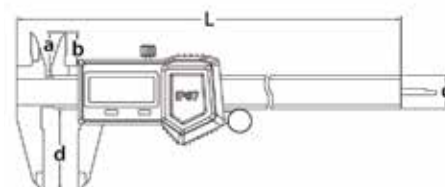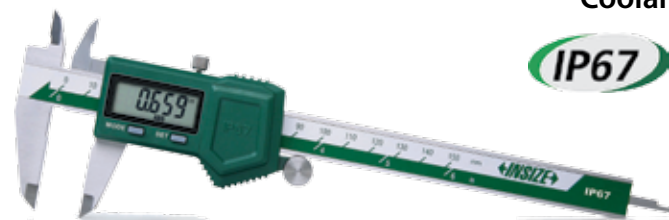

- Resolution: 0.0005"/0.01mm
- Coolant proof, IP67 Ingress protection level
- Button functions: zero, on/off, inch/mm, ABS/REL, hold
- Battery CR2032
- Stainless steel
- Supplied in fitted storage case

Range (Inch/mm)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	d (Inch)	INSIZE No.	Code
0-6/0-150	±0.0012	9.291	0.827	0.630	0.630	1.575	1118-150B	816018
0-8/0-200	±0.0012	11.260	0.945	0.748	0.630	1.969	1118-200B	280014
0-12/0-300	±0.0012	15.748	0.984	0.807	0.669	2.362	1118-300B	280015