


Outside Micrometers



Inch & Metric

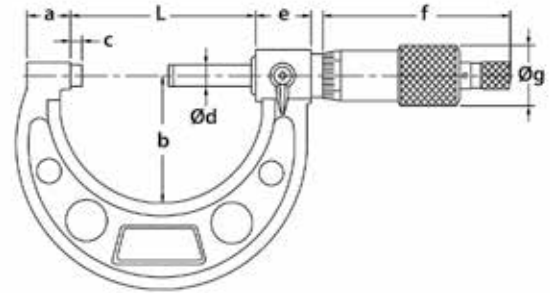

MICROMETERS

- Graduation: Inch 0.0001"; Metric 0.01mm
- Ratchet stop
- Carbide tips
- Micrometers over 1"/25mm are supplied with a setting standard
- Supplied in fitted storage case

Inch

Range (Inch)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	Ød (Inch)	e (Inch)	f (Inch)	Øg (Inch)	INSIZE No.	Code
0-1	±0.00016	1.260	0.354	1.102	0.118	0.256	0.669	2.598	0.709	* 3203-1A	816564
1-2	±0.00016	2.244	0.551	1.496	0.118	0.256	0.669	2.598	0.709	* 3203-2A	816566
2-3	±0.00020	3.228	0.591	1.929	0.118	0.256	0.669	2.598	0.709	* 3203-3A	816568
3-4	±0.00020	4.213	0.591	2.362	0.118	0.256	0.669	2.598	0.709	* 3203-4A	816570
4-5	±0.00024	5.236	0.650	2.874	0.118	0.256	0.669	2.598	0.709	* 3203-5A	816572
5-6	±0.00024	6.220	0.650	3.346	0.118	0.256	0.669	2.598	0.709	* 3203-6A	816574
6-7	±0.00028	7.205	0.764	4.094	0.118	0.256	0.669	2.598	0.709	3203-7A	816576
7-8	±0.00028	8.228	0.764	4.606	0.118	0.256	0.669	2.598	0.709	3203-8A	816578
8-9	±0.00031	9.213	0.764	5.118	0.118	0.256	0.669	2.598	0.709	3203-9A	816580
9-10	±0.00031	10.236	0.764	5.591	0.118	0.256	0.669	2.598	0.709	3203-10A	816582
10-11	±0.00035	11.220	0.764	6.102	0.118	0.256	0.669	2.598	0.709	3203-11A	816584
11-12	±0.00035	12.205	0.764	6.614	0.118	0.256	0.669	2.598	0.709	3203-12A	816586

* NIST Certification

Metric

Range (mm)	Accuracy (µm)	L (mm)	a (mm)	b (mm)	c (Inch)	Ød (Inch)	e (Inch)	f (Inch)	Øg (Inch)	INSIZE No.	Code
0-25	4	32	9	28	0.118	0.256	0.669	2.598	0.709	* 3203-25A	816530
25-50	4	57	14	38	0.118	0.256	0.669	2.598	0.709	* 3203-50A	816532
50-75	5	82	15	49	0.118	0.256	0.669	2.598	0.709	* 3203-75A	816534
75-100	5	107	15	60	0.118	0.256	0.669	2.598	0.709	* 3203-100A	816536
100-125	6	133	16.5	73	0.118	0.256	0.669	2.598	0.709	3203-125A	816538
125-150	6	158	16.5	85	0.118	0.256	0.669	2.598	0.709	3203-150A	816540
150-175	7	183	19.4	104	0.118	0.256	0.669	2.598	0.709	3203-175A	816542
175-200	7	209	19.4	117	0.118	0.256	0.669	2.598	0.709	3203-200A	816544
200-225	8	234	19.4	130	0.118	0.256	0.669	2.598	0.709	3203-225A	816546
225-250	8	260	19.4	142	0.118	0.256	0.669	2.598	0.709	3203-250A	816548
250-275	8	285	19.4	155	0.118	0.256	0.669	2.598	0.709	3203-275A	816550
275-300	8	310	19.4	168	0.118	0.256	0.669	2.598	0.709	3203-300A	816552

* NIST Certification