

Dial Indicator

Metric



- Lug back
- Bezel locking clamp and tolerance index
- Contact point thread: M2.5 x 0.45
- Supplied in fitted storage case



OPTIONAL ACCESSORIES: Contact points, Flat back



Range (mm)	Graduation (mm)	Accuracy (mm)	Range per Rev (mm)	Dial Reading	INSIZE No.	Code
25	0.1	0.06	10	0-10	2318-25	816164

Long Stroke Dial Indicators



- Lug back
- Bezel locking clamp and tolerance index
- Contact point thread: #4-48UNF
- Supplied in fitted storage case

OPTIONAL ACCESSORIES: Contact points
Flat back

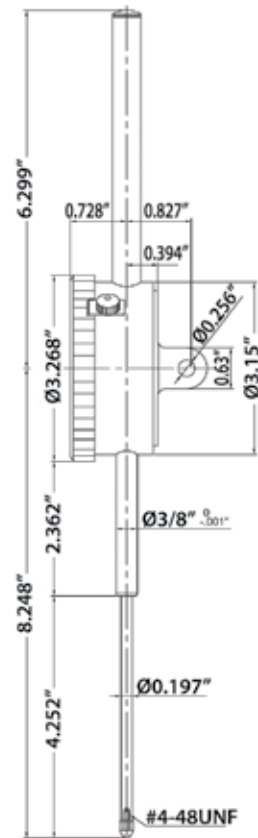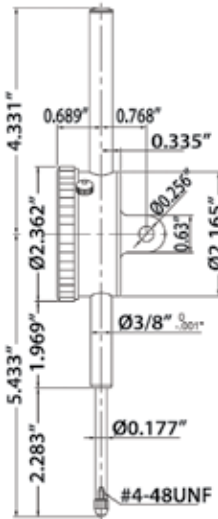

Range (Inch)	Graduation (Inch)	First 2.5 Rev Accuracy (Inch)	Overall Accuracy (Inch)	Range per Rev (Inch)	Dial Reading	INSIZE No.	Code
* 2	0.001	±0.001	±0.004	0.1	0-100	2326-2	282715
3	0.001	±0.001	±0.005	0.1	0-100	2326-3	282717
4	0.001	±0.001	±0.005	0.1	0-100	2326-4	282718

NOTE: 282717 and 282718 can only be used vertically