


Block Levels



- V-groove on bottom for shafts (shaft diameter 0.63 to 2.76")
- With transverse vial
- Supplied with adjusting wrench




816328


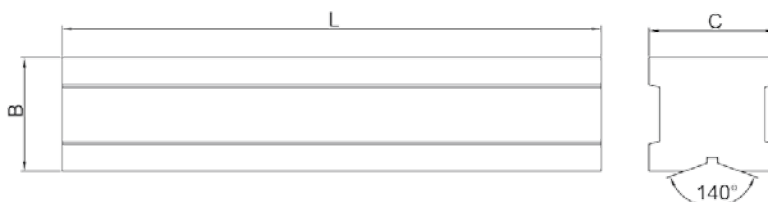


L (Inch)	Sensitivity (Inch)	INSIZE No.	Code
6	0.0002/10	4901-6	816326
8	0.0002/10	4901-8	816328
12	0.0002/10	4901-12	816330

Electronic Level & Protractor


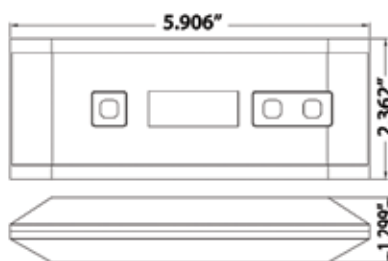


- Resolution: 0.1° (=0.021 in/ft)
- Accuracy: 0° and 90°: ±0.1°; others: ±0.2°
- Used as level and protractor
- Aluminum frame
- Magnetic bottom with v-groove for shafts
- Zero setting may be used at any angle on plain surfaces
- Buttons: on/off, zero, hold
- Display rotates when gage is upside down
- Battery CR2032
- Auto power off
- Supplied in leather pouch

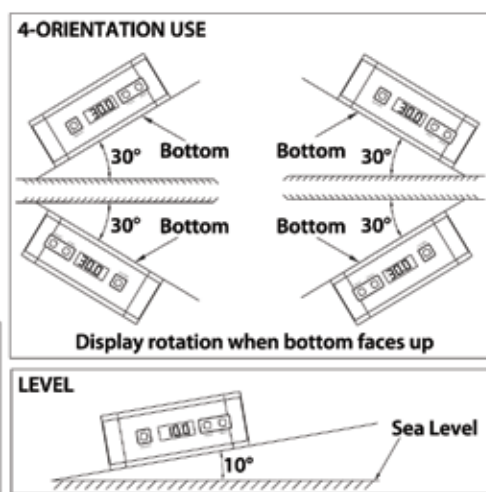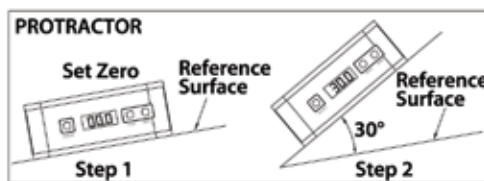

Range	INSIZE No.	Code
0-360° (4 x 90°)	2173-360	816340

Electronic Level & Protractor

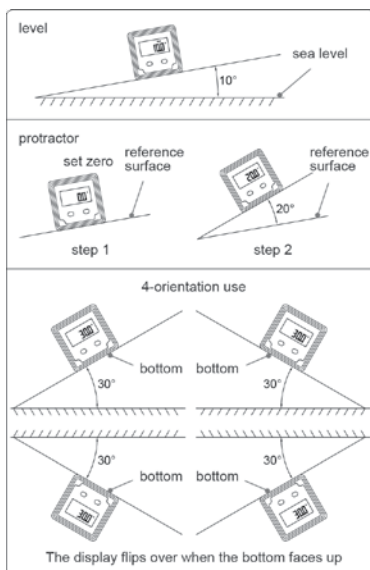

- Resolution: 0.1° (=0.021 in/ft)
- Accuracy: 0° and 90°: ±0.1°; others: ±0.2°
- Used as level and protractor
- Aluminum frame
- Magnetic bottom
- Display rotates when gage is upside down
- Backlight on automatically when in use - auto off 15 minutes after use
- Sea level is permanently set inside the chip - zero setting not required when battery is replaced
- Buttons: on/off, zero, absolute and incremental measurement
- Battery 1 x AAA
- Auto power off

Range	INSIZE No.	Code
4 x 90°	2170-1	816396