


## Oil Country Lathe Chucks 4-Jaw Independent Chuck & Accessories

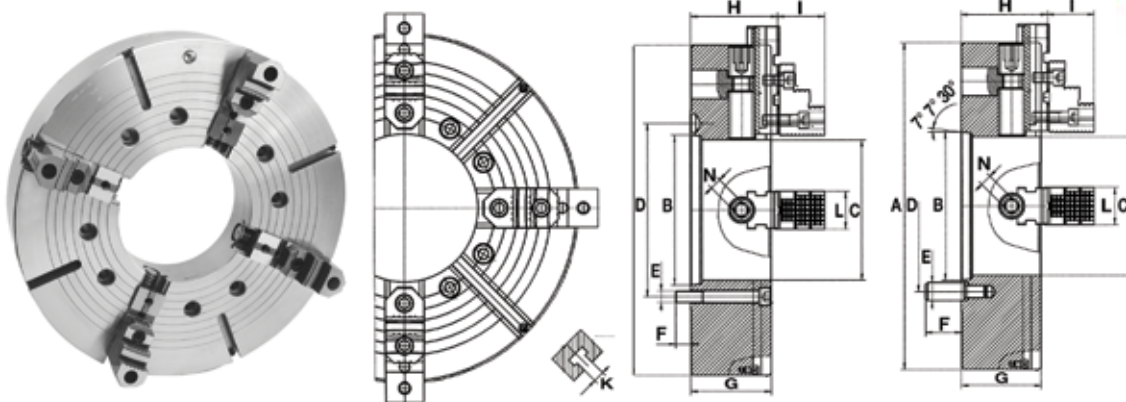

- Extra heavy-duty forged steel body

**Standard Accessories:**

- 1 set of two-piece reversible jaws (hard top and hard master jaws)
- 1 wrench
- 1 set of mounting bolts
- 2 Allen keys
- 2 eye bolts

**Optional Accessories:**

- Soft top jaws

Chuck Diameter (Inches)	Hole Diameter (Inches)	Gripping Force (lbs)	Clamping Capacity (Inches)	
			Minimum	Maximum
15-3/4	5.3	7060	1.77	15.75
15-3/4	6.5	7060	1.77	15.75
20	5.3	7060	1.77	19.68
20	6.5	7060	1.77	19.68
20	8.0	7060	1.77	19.68
25	10.5	8160	1.97	24.80
25	12.5	8160	3.94	24.80
28	10.5	9040	2.95	27.95
28	12.5	9040	3.94	27.95
32	10.5	9040	2.95	31.50
32	12.5	9040	4.53	31.50

### A Type Spindle

D Chuck Diameter (Inch)	Mounting Type	C Hole Diameter (Inch)	B +001" (Inch)	D (Inch)	G (Inch)	H (Inch)	I (Inch)	K (Inch)	L (Inch)	N (Inch)	Maximum RPM	Weight (lbs)	Code
20	A2-15	8.0	11.251	13.000	5.71	6.067	2.981	0.866	2.362	0.748	1000	414	355309
25	A2-15	10.5	11.251	13.000	6.10	6.579	3.571	0.866	2.953	0.866	850	684	355310
25	A2-20	12.5	16.251	18.252	6.10	6.579	3.571	0.866	2.953	0.866	850	662	355311
28	A2-15	10.5	11.251	13.000	6.10	6.579	3.571	0.866	2.953	0.866	750	915	355312
28	A2-20	12.5	16.251	18.252	6.10	6.579	3.571	0.866	2.953	0.866	750	871	355313
32	A2-15	10.5	11.251	13.000	6.50	6.972	3.571	0.866	2.953	0.866	600	1290	355314
32	A2-20	12.5	16.251	18.252	6.50	6.972	3.571	0.866	2.953	0.866	600	1246	355315

### D1 Type Spindle

D Chuck Diameter (Inch)	Mounting Type	C Hole Diameter (Inch)	B +001" (Inch)	D (Inch)	G (Inch)	H (Inch)	I (Inch)	K (Inch)	L (Inch)	N (Inch)	Maximum RPM	Weight (lbs)	Code
15-3/4	D1-8	5.3	5.500	6.750	5.71	6.067	2.981	0.709	2.362	0.748	1200	300	355316
15-3/4	D1-11	6.5	7.750	9.252	5.71	6.067	2.981	0.709	2.362	0.748	1200	282	355317
20	D1-8	5.3	5.500	6.750	5.71	6.067	2.981	0.866	2.362	0.748	1000	468	355318
20	D1-11	6.5	7.750	9.252	5.71	6.067	2.981	0.866	2.362	0.748	1000	452	355319
28	D1-11	7.5	7.750	9.252	6.10	6.579	3.570	0.866	2.953	0.866	750	993	355320