


T-Slot Nuts

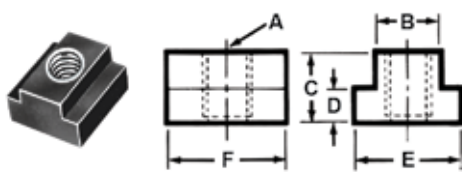

- Black oxide finish
- Case hardened
- Many sizes conform to TCMA standards
- The last thread is incomplete on T-Slot nuts to prevent the stud from turning through bottom of nut into machine table

B Table Slot (Inch)	A Thread Size	E (Inch)	D (Inch)	C (Inch)	F Length (Inch)	Code
3/8	5/16 – 18	5/8	3/16	1/2	7/8	400701
7/16	3/8 – 16	11/16	7/32	1/2	7/8	400702
1/2	3/8 – 16	7/8	9/32	1/2	7/8	400704
9/16	3/8 – 16	7/8	11/32	5/8	1-1/8	400706
9/16	1/2 – 13	7/8	11/32	5/8	1-1/8	400708
5/8	1/2 – 13	1	11/32	5/8	1-1/8	400710
11/16	1/2 – 13	1-1/8	7/16	3/4	1-1/4	400712
11/16	5/8 – 11	1-1/8	7/16	3/4	1-1/4	400714
3/4	5/8 – 11	1-1/4	15/32	3/4	1-1/4	400716
13/16	5/8 – 11	1-1/4	9/16	1	1-1/2	400718
13/16	3/4 – 10	1-1/4	9/16	1	1-1/2	400720
7/8	3/4 – 10	1-1/2	9/16	1	1-1/2	400722
1	3/4 – 10	1-5/8	5/8	1	1-3/4	400724
1-1/16	3/4 – 10	1-5/8	11/16	1-1/8	2	400726
1	7/8 – 9	1-5/8	5/8	1	1-3/4	400728
1-1/16	1 – 8	1-5/8	11/16	1-1/8	2	400730

T-Slot Cleaner




- Heat treated steel
- Black oxide finish
- Eliminates the danger of removing chips with air
- Saves time

Northwestern

Length (Inch)	Code
6	217389

T-Slot Bolts

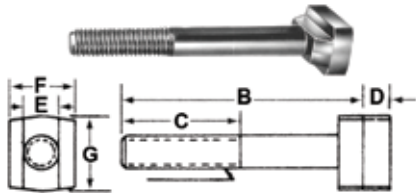

- Black oxide finish
- Medium carbon steel
- Diameters offered include 3/8", 1/2", 5/8", 3/4", 7/8" and 1"
- T-Slot bolt head thickness "D" is undersized to fit machine table slot
- Thread class 2A UNC
- Sizes functionally interchange with forged T-Slot bolts

Northwestern

3/8-16

B Length (Inch)	C (Inch)	D (Inch)	E (Inch)	F (Inch)	G (Inch)	Code	B Length (Inch)	C (Inch)	D (Inch)	E (Inch)	F (Inch)	G (Inch)	Code
1-1/2	1	13/64	3/8	5/8	3/4	217390	3-1/2	1-1/2	13/64	3/8	5/8	3/4	217394
2	1-1/4	13/64	3/8	5/8	3/4	217391	4	1-1/2	13/64	3/8	5/8	3/4	217395
2-1/2	1-1/2	13/64	3/8	5/8	3/4	217392							
3	1-1/2	13/64	3/8	5/8	3/4	217393							

5/8-11

B Length (Inch)	C (Inch)	D (Inch)	E (Inch)	F (Inch)	G (Inch)	Code	B Length (Inch)	C (Inch)	D (Inch)	E (Inch)	F (Inch)	G (Inch)	Code
1-1/2	1	5/16	5/8	1-1/64	1-1/8	217404	3-1/2	1-1/2	5/16	5/8	1-1/64	1-1/8	217408
2	1-1/4	5/16	5/8	1-1/64	1-1/8	217405	4	1-1/2	5/16	5/8	1-1/64	1-1/8	217409
2-1/2	1-1/2	5/16	5/8	1-1/64	1-1/8	217406	5	1-1/2	5/16	5/8	1-1/64	1-1/8	217410
3	1-1/2	5/16	5/8	1-1/64	1-1/8	217407	6	2	5/16	5/8	1-1/64	1-1/8	217411
							8	3	5/16	5/8	1-1/64	1-1/8	217412